

BEST BASIC WINDOWS PVC EQUIPMENT

PREMIUM PROFILES

7-chamber window system in class A with triple sealing, creating a dry chamber

SASH LIFT

Facilitates the closing of large and heavy window sashes

THIN WELD

Provides the sash with an elegant look and aesthetics

MINIMUM 2 ANTI-BURGLARY LATCHES

At least two latches and anti-burglary rollers, effectively protecting against burglary attempts and increasing resistance to mechanical forces

GRADED TILT

Allows adjusting the ventilation intensity to atmospheric conditions

DUST SEAL

Protects the hardware rebate from collecting operational dirt

HANDLE POSITION BLOCK

Increases the comfort of using the window and prevents the sash from falling out of the upper hinge

INNOVATIVE HANDLE MECHANISM

Prevents manipulation of the window from the outside, enhancing room security

REINFORCED HINGES

Load capacity of standard hinges up to 130kg

REINFORCEMENT

Galvanized steel profiles with a thickness of 1.5 mm guarantee durability, while the sashes use reinforcements ranging from 1.5 to 2 mm, depending on the construction size, ensuring structural integrity

SWISSPACER WARM EDGE SPACER

Made of a material with a very low thermal conductivity coefficient. It improves the thermal insulation of the entire construction, reducing energy loss through the spacer. It also enhances the performance of glass packages by limiting condensation and increasing water vapor absorption, thus contributing to thermal comfort and energy savings

ENERGY-SAVING GLASS PACKAGE


Ug coefficient = 0,5 W/m²K

WINDOW SILL STRIP

It facilitates the installation of window sills and protects the frame from potential damage during transport

WINDOW TRANSPORT HANDLES

Make window and door transport easier on construction sites

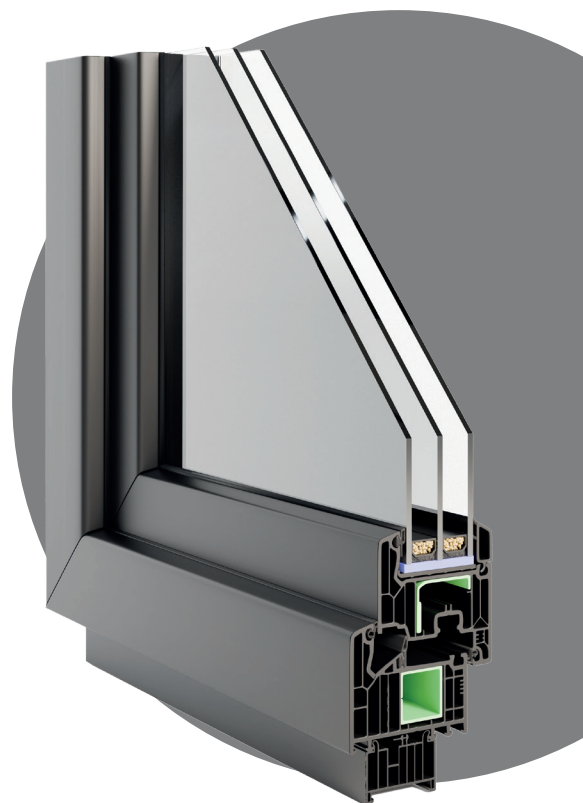


recommended for new homes



VEKA SOFTLINE 82 MD

Windows based on VEKA Softline 82 MD profiles are an excellent solution for those who value quality and reliability. Thanks to the innovative 7-chamber profile construction, they provide excellent thermal and acoustic insulation, enabling energy savings and comfortable use. Windows based on this system guarantee durability and resistance to weather conditions. It is an ideal solution for those who expect the highest quality and long-lasting performance.

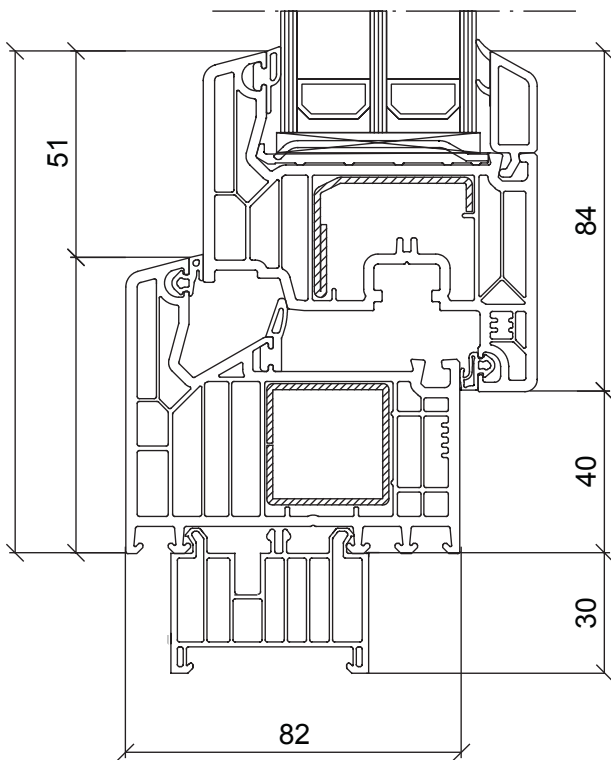

0,74

U_w (W/m² K) for a glazing unit
U_g = 0.5 W/m² K
with a warm edge spacer

7/6

frame/sash

3

gasket

82

gasket depth
installation
(mm)

A

class

4

air permeability class
according to
EN 12207

9A

water tightness class
according to
EN 12208

C5

resistance to
wind load according
to EN 12210